


PV-MC4_LK_SCA-003

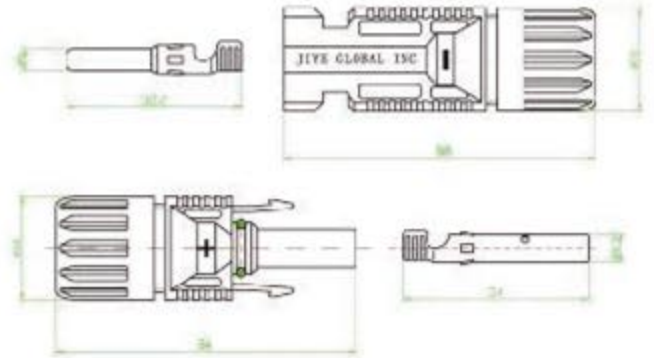

PV-Cable coupler

Rated voltage	1000V	DC
Rated current	30A	
Contact resistance:	0.18-0.20mΩ	
Contact material	copper, silver plated	
Insulation material	PC/PA	
Locking system	snap-in	
Safety class	II	
Degree of Protection(unmated/mated)	IP2X/IP67	
Touch protected when unmated		
Operating temperature	- 40	- 85
Flame class	V0	
Standard	DIN V VDE V 0126-3	
Authentication	TUV	
Crimping range	PV-MC4 (LK-SCA-003)	4/6mm ²

Stand against UV with long time stability